


# Concrete anchor injection molded

CODE: 582

### Benefits & Features:

- available in multiple materials and dimensions
- 100% leak tight solution due to welding compatibility with the concrete protective liner and the HYDRO<sup>CLICK</sup> system
- easy and fast installation
- integrated circumferential chamfer reduces welding preparation time

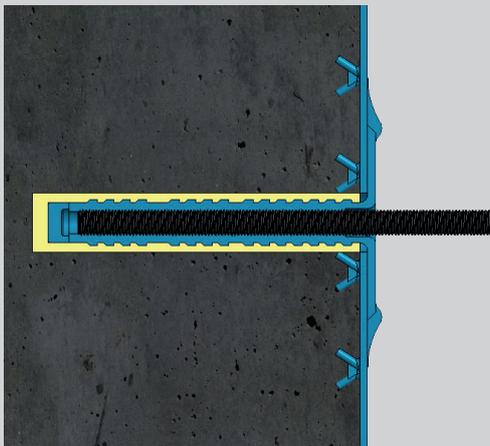

Accessories and Appurtenances (e.g. ladders, pipes, etc.) require proper mounting in concrete structures which are lined with concrete protective liner or HYDRO<sup>CLICK</sup>.

The new AGRU concrete anchor was developed to guarantee a tight mechanical connection to the concrete structure. Previously this was often accomplished by unique customer solutions.

The concrete anchor and the lining system provide a 100% leak tight weld through extrusion welding as they are produced with the same thermoplastic resins.

AGRU's new concrete anchor provides flexibility in solutions by offering products in different materials, lengths and dimensions.

### SUPPLY RANGE CODE 582

Dimensions	Material
M16/200 mm	HDPE black / PE 80 blue / PP-R gray
M16/150 mm	HDPE black / PE 80 blue
M12/200 mm	HDPE black / PE 80 blue
M12/150 mm	HDPE black / PE 80 blue / PP-R gray

\*length of 100 mm on request

